

23m

2W
LED

IP40



LBOX 200

Housing made from steel sheeting, powder coated in white.

Available as wall and ceiling mounting with light openings on the underside and pictogram pane (to be ordered separately).


The luminaire is delivered with a 2 watt LED-bar.

Technical specifications

Visibility distance	23 m
Connecting terminals	3 x 2,5 mm ² for double assignment
Casing/colour	Sheet steel / white other colours available on request
Type of assembly	Wall mounting or ceiling mounting
Dimensions (W x H x D)	265 x 143 x 60 mm
Protection class	IP40
Safety class	I



	■ Luminaires for central battery systems	■ Self contained luminaires
Illuminant	2W LED-bar	2W LED-bar
Light current mains operation	260lm	260lm
Luminous flux		
Emergency (DC)/mains	-	15% - 50% / 100%
Power consumption	5,5VA	5,5VA
Battery current input	14mA	-
Rated operating time		
Battery operation	-	1h/3h/8h
Voltage supply	230V 50/60Hz / 220V DC +25/-20%	230V 50/60Hz
NiMh-Akku	-	4,8V 0,8Ah
Temperature range	-10°C to +40°C	-
non-maintained mode	-	-0°C to +35°C
maintained mode	-	-5°C to +30°C
optional:		
Multi-switch and monitoring module	MSÜ3 SET009 SET010 DALI	-
Self monitoring	-	SELF CHECK
Central monitoring	-	SAFELOG

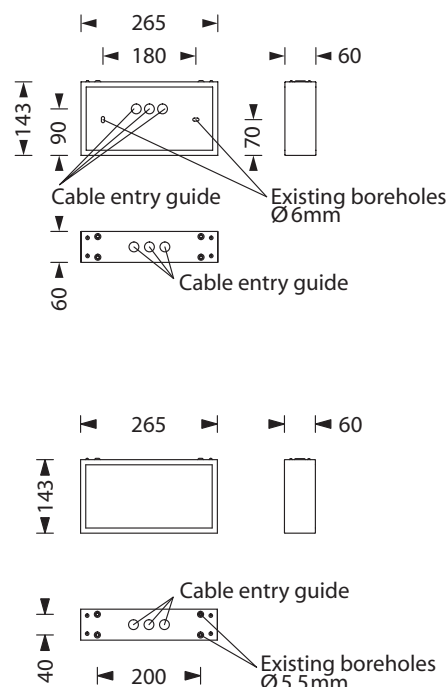

Accessories

Cable assembly set only for ceiling mounting	Exit pictogram FR
Chain assembly set only for ceiling mounting	Exit pictogram FL
Wall bracket, white	Exit pictogram FU
Central pendulum	Blind pane for single-sided pictogram mounting
Wire guard for wall mounting	

Pictograms*




Exit pictogram FR



Exit pictogram FL



Exit pictogram FU



Blind pane for single-sided pictogram mounting

* Other pictograms available on request.

Technische Änderungen vorbehalten/Technical changes reserved